



Astra IP 1x1 (Standard Yoke, US Power Cable)

SKU: 936-1301

- Bi-Color 1x1 LED panel (2,700K to 6,500K)
- IP65 weatherproof rating
- High output of 3,000 lux at 10ft/3m with 30° beam angle
- Diffusion panel included
- CRI/TLCI average 95
- Easy to carry at just 9.7lb/4.4kg
- Compatible with a wide range of mobile power options
- Integrated Bluetooth with optional DMX module
- Range of optional modifiers and other accessories



PRODUCT DESCRIPTION

All-Weather Performance

The industry's best-selling Bi-Color LED panel has evolved. Astra IP is tough and water-resistant, delivering intense output in lightweight 1x1, half-size and 2x1 fixtures with fast set up for high-performance broadcast lighting in demanding environments.

TECHNICAL SPECIFICATIONS


| | |
|-------------------------------|---|
| Range | 1 X 1, Astra IP |
| Comparative Output | Daylight (Lux at 10ft/3m): 3000 (No diff) |
| CRI Daylight | 95 |
| CRI Tungsten | 95 |
| Width | 43.1 cm 16.97 in |
| Height | 42.7 cm 16.81 in |
| Depth | 10.8 cm 4.25 in |
| Max Power Draw | 125W |
| Optics | 30° custom TIR lens |
| Remote Control | Bluetooth (integrated), DMX, RDM (requires separate module) |
| Mounting Method | TVMP |
| Color Temperature | 2,700° - 6500°K |
| Dimming Control | Constant Current 0-100% Continuous (flicker free) |
| Lighting Control Modes | CCT/FX single dial with LCD menu control |
| Fan Control | Yes |
| USB Updates | Yes |
| Ambient Temp Operation | -20 °C to 45 °C -4 °F to 113 °F |
| Estimated LED lifetime | 50000+ hrs |
| Height (Without Yoke) | 31.4 cm 12.36 in |
| Width (Without Yoke) | 37.6 cm 14.8 in |
| Depth (Without Yoke) | 10.8 cm 4.25 in |
| Weight | 4.4 kg 9.7 lb |

IN THE BOX

- [936-1301 - Astra IP 1×1 \(Standard Yoke, US Power Cable\)](#)
- [937-0024 - Astra IP 1×1 Diffuser Medium](#)

PHOTOMETRICS

Tungsten 3200K

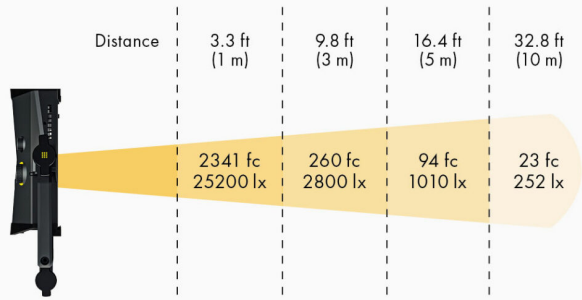

Daylight 5600K

