

Astra IP Half (Standard Yoke, EU Power Cable)

SKU: 936-0101

- Compact Bi-Color LED panel (2,700K to 6,500K)
- IP65 weatherproof rating
- High output of 1,500 lux at 10ft/3m with 30° beam angle
- Diffusion panel included
- CRI/TLCI average 95
- Easy to carry at just 6.2lb/2.8kg
- Compatible with a wide range of mobile power options
- Integrated Bluetooth with optional DMX module
- Range of optional modifiers and other accessories



PRODUCT DESCRIPTION

All-Weather Performance

The industry's best-selling Bi-Color LED panel has evolved. Astra IP is tough and water-resistant, delivering intense output in lightweight 1x1, half-size and 2x1 fixtures with fast set up for high-performance broadcast lighting in demanding environments.

TECHNICAL SPECIFICATIONS


Range	Astra IP, Half
Comparative Output	Daylight (Lux at 10ft/3m): 1500
CRI Daylight	95
CRI Tungsten	95
Width	43.2 cm 17.01 in
Height	30.8 cm 12.13 in
Depth	10.6 cm 4.17 in
Max Power Draw	63W
Optics	30° custom TIR lens
Remote Control	Bluetooth (integrated), DMX, RDM (requires separate module)
Mounting Method	TVMP
Color Temperature	2,700° - 6500°K
Dimming Control	Constant Current 0-100% Continuous (flicker free)
Lighting Control Modes	CCT/FX single dial with LCD menu control
USB Updates	Yes
Ambient Temp Operation	-20 °C to 45 °C -4 °F to 113 °F
Estimated LED lifetime	50000+ hrs
Height (Without Yoke)	18.9 cm 7.44 in
Width (Without Yoke)	37.6 cm 14.8 in
Depth (Without Yoke)	10.6 cm 4.17 in
Weight	2.8 kg 6.17 lb

IN THE BOX

- [936-0101 - Astra IP Half \(Standard Yoke, EU Power Cable\)](#)
- [937-0023 - Astra IP Half Diffuser Medium](#)

PHOTOMETRICS

Daylight 5600K

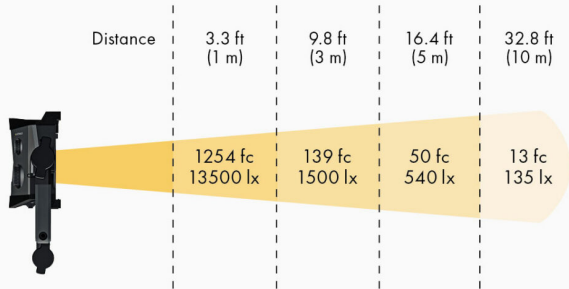

Tungsten 3200K

