



Astra IP 2x1 (Standard Yoke, US Power Cable)

SKU: 936-2301

- Bi-Color 2x1 LED panel (2,700K to 6,500K)
- IP65 weatherproof rating
- High output of 5,500 lux at 10ft/3m with 30° beam angle
- Diffusion panel included
- CRI/TLCI average 95
- Lightweight at just 17.2lb/7.8kg
- Compatible with a wide range of mobile power options
- Integrated Bluetooth with optional DMX module
- Range of optional modifiers and other accessories



PRODUCT DESCRIPTION

All-Weather Performance

The industry's best-selling Bi-Color LED panel has evolved. Astra IP is tough and water-resistant, delivering intense output in lightweight 1x1, half-size and 2x1 fixtures with fast set up for high-performance broadcast lighting in demanding environments.

TECHNICAL SPECIFICATIONS


Range	2 X 1, Astra IP
Comparative Output	Daylight (Lux at 10ft/3m): 5500
CRI Daylight	95
CRI Tungsten	95
Width	68.7 cm 27.05 in
Height	42.6 cm 16.77 in
Depth	12.3 cm 4.84 in
Max Power Draw	250W
Optics	30° custom TIR lens
Remote Control	Bluetooth (integrated), DMX, RDM (requires separate module)
Mounting Method	Junior Pin
Color Temperature	2,700° - 6500°K
Dimming Control	Constant Current 0-100% Continuous (flicker free)
Lighting Control Modes	CCT/FX single dial with LCD menu control
Fan Control	Yes
USB Updates	Yes
Ambient Temp Operation	-20 °C to 45 °C -4 °F to 113 °F
Estimated LED lifetime	50000+ hrs
Height (Without Yoke)	31.3 cm 12.32 in
Width (Without Yoke)	63.2 cm 24.88 in
Depth (Without Yoke)	12.3 cm 4.84 in
Weight	7.8 kg 17.2 lb

IN THE BOX

- [936-2301 - Astra IP 2×1 \(Standard Yoke, US Power Cable\)](#)
- [937-0025 - Astra IP 2×1 Diffuser Medium](#)

PHOTOMETRICS

Daylight 5600K

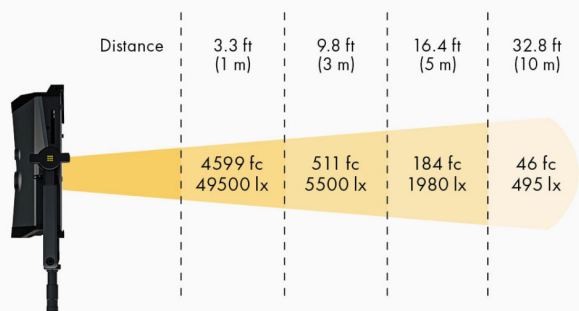

Tungsten 3200K

