



## Gemini 2x1 Soft RGBWW LED Panel (Pole-Operated Yoke, EU Power Cable)

**SKU:** 940-1102

- Lux at 10ft/3m: 1079 (Daylight)
- Extended CCT range: 2,700-10,000°K
- Color accuracy: TLCI/CRI: 99
- Weight: 22.27lbs / 10.1kg
- Full RGBWW color gamut mixing
- Flicker-free dimming at any frame rate
- Wired or wireless DMX & Bluetooth control
- Optional mobile battery power





## PRODUCT DESCRIPTION

### CREATIVE, HIGH OUTPUT, QUALITY CINEMATIC LIGHTING

Unleash your creative vision and bring high quality cinematic lighting to your set with the lightweight versatile Gemini 2x1 Soft. Control light precisely with more creative options than ever, from a beautiful soft white light to full RGBWW, Gemini delivers the instant flexibility you need for endless creative lighting options in one unique easy-to-handle fixture. Whether in the studio or out on location, the high-output, quick-to-rig Gemini 2x1 provides exceptional results for any production.

## TECHNICAL SPECIFICATIONS

|                           |                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------|
| <b>Range</b>              | 2x1 LED Panels                                                                            |
| <b>Color Temperature</b>  | RGBWW                                                                                     |
| <b>Beam Angle</b>         | 93                                                                                        |
| <b>Comparative Output</b> | 1079 lux Daylight at 10ft/3m, 906 Tungsten at 10ft/3m                                     |
| <b>CRI Daylight</b>       | 99                                                                                        |
| <b>CRI Tungsten</b>       | 99                                                                                        |
| <b>Width</b>              | 63.5 cm   25 in                                                                           |
| <b>Height</b>             | 16.5 cm   6.5 in                                                                          |
| <b>Depth</b>              | 31.8 cm   12.52 in                                                                        |
| <b>Weight</b>             | 10.1 kg   22.27 lb                                                                        |
| <b>Gel Filter</b>         | Optional Daylight or Tungsten source                                                      |
| <b>Max Power Draw</b>     | 325W                                                                                      |
| <b>Optics</b>             | Medium diffusion panel                                                                    |
| <b>Remote Control</b>     | Built-in Wired DMX (RJ-45 and XLR5) / Wireless DMX (LumenRadio) Module / Bluetooth Module |
| <b>Battery Option</b>     | Optional battery bracket (not included)                                                   |
| <b>Wireless</b>           | Yes                                                                                       |
| <b>Mounting Method</b>    | Junior Pin                                                                                |
| <b>Rear LCD Screen</b>    | Yes                                                                                       |
| <b>IP Rating</b>          | IP20                                                                                      |
| <b>Field Angle</b>        | 156                                                                                       |


## IN THE BOX

- Litepanels Gemini 2×1 Soft RGBWW Fixture with integrated power supply
- Pole-Operated Yoke with Junior Pin
- 3m EU powerCON cable

## COLOR CHARTS

Gemini 2x1 Soft Panel (5600K): CCT = D5614 ( -0.7 )


TLCI-2012 : 97 (D5614)

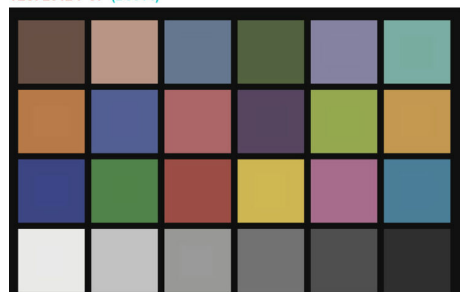

ColorChecker video (800/700) coded


EBU : TLCI-2012  
Litepanels

| Sector | Lightness | Chroma | Hue |
|--------|-----------|--------|-----|
| R      | 0         | 0      | 0   |
| R/Y    | 0         | 0      | -   |
| Y      | 0         | 0      | 0   |
| Y/G    | 0         | 0      | 0   |
| G      | 0         | 0      | 0   |
| G/C    | 0         | 0      | 0   |
| C      | 0         | 0      | 0   |
| C/B    | 0         | 0      | -   |
| B      | 0         | -      | 0   |
| B/M    | 0         | -      | 0   |
| M      | 0         | 0      | 0   |
| M/R    | 0         | 0      | 0   |



Gemini 2x1 Soft Panel (3200K): CCT = P3239 ( -0.1 )



TLCI-2012 : 99 (P3239)

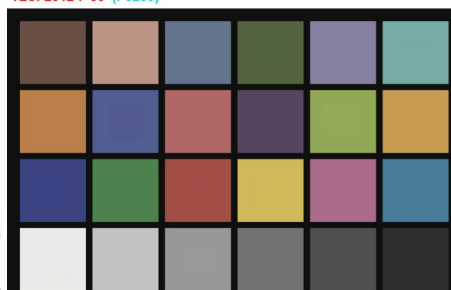

ColorChecker video (800/700) coded

EBU : TLCI-2012  
Litepanels

| Sector | Lightness | Chroma | Hue |
|--------|-----------|--------|-----|
| R      | 0         | 0      | 0   |
| R/Y    | 0         | 0      | 0   |
| Y      | 0         | 0      | 0   |
| Y/G    | 0         | 0      | 0   |
| G      | 0         | 0      | 0   |
| G/C    | 0         | 0      | 0   |
| C      | 0         | 0      | 0   |
| C/B    | 0         | 0      | 0   |
| B      | 0         | -      | 0   |
| B/M    | 0         | 0      | 0   |
| M      | 0         | 0      | 0   |
| M/R    | 0         | 0      | 0   |

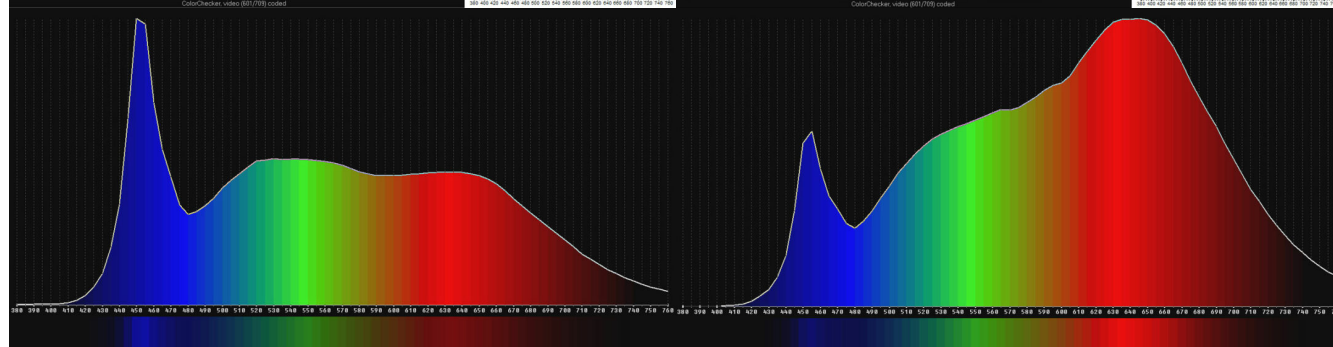

## YOU MAY ALSO LIKE...



[Astra 6X Daylight LED Panel](#)



[Astra Bi-Focus Daylight LED Panel](#)



[Gemini 1x1 Soft RGBWW LED Panel \(Standard Yoke, Bare Ends\)](#)